



Liquid Level Sensing 3107

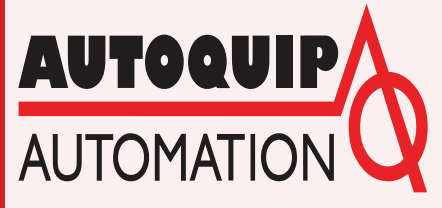

System Description

The PLC controlled level sensing system provides real time measurement of fluid levels in hazardous and non-hazardous conditions. The ultrasonic non-contact sensor is capable of providing high and low levels using both visual and/or audible alarms. Our system delivers a small, compact and simple to use package that can be easily customized for mix, transfer or waste tanks of varying depths.

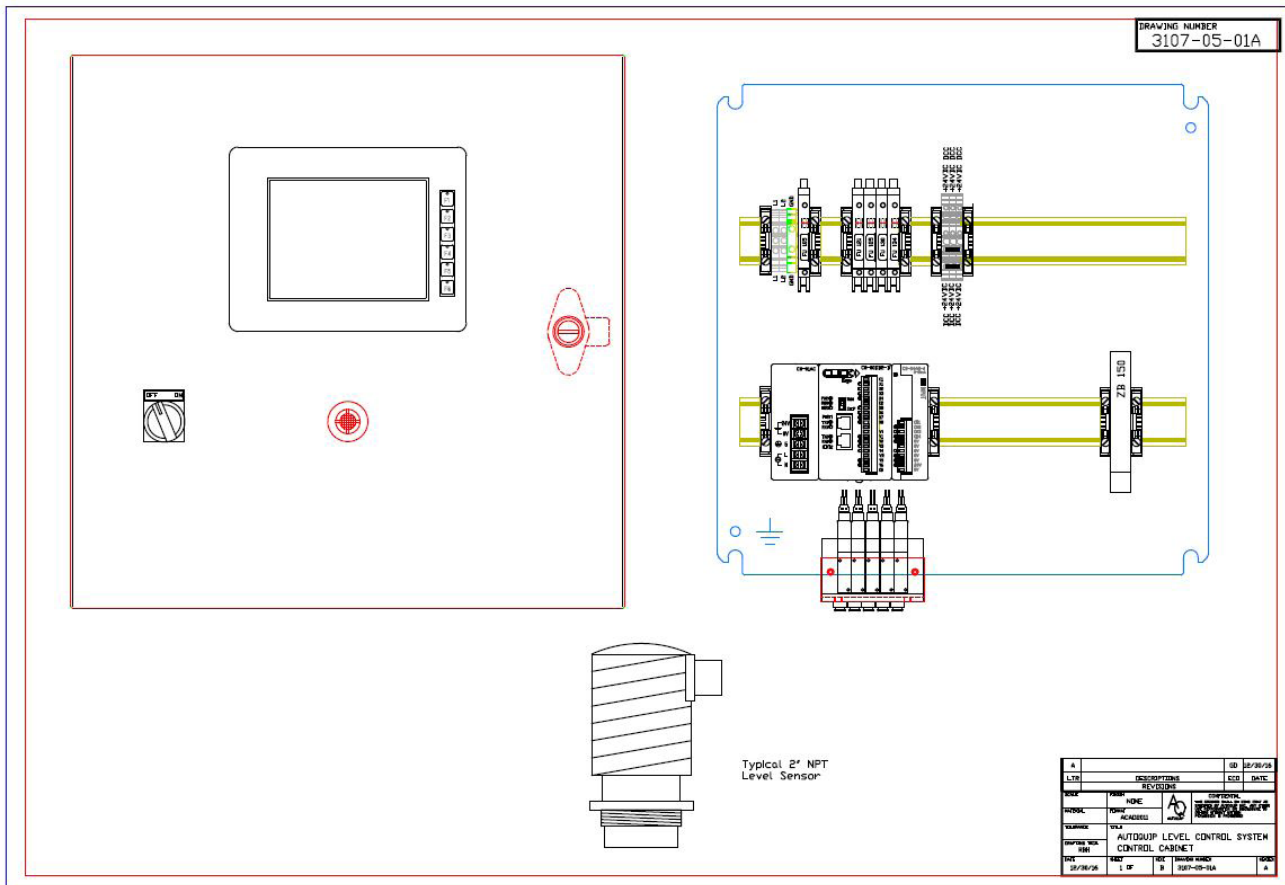

Standard Features/Benefits

- Inexpensive method of single or dual level indication and annunciation.
- User programmable outputs for response to different detected levels.
- Audible alarms for warning and faults.
- Non-contact ultrasonic level sensor that works with numerous level sensors that can be programmed for multiple levels.
- Standard configuration is for a non-contact, non-hazardous application. Also available in explosion proof or intrinsically safe configurations.
- Five programmable solenoid outputs.

Technical Specifications

Range: 0.5 to 18 feet (15 cm to 5.4 m)

Beam width: 8° conical

Temperature rating: F: -40° to 140° C: -40° to 60° Temp. compensation: Automatic over entire range

Pressure rating: 30 psi (2 bar) @ 25 °C., derated @ 1.667 psi (.113 bar) per °C. above 25 °C.

Enclosure rating: NEMA 4X (IP65)

Enclosure material: Polypropylene (PP), U.L. 94V0

Transducer material: Polyvinylidene Fluoride (PVDF)

Mounting gasket: Viton (2") metric only

Power Requirements: 120 VAC @ 2 Amps

Level Sensor Cable Requirements: 2 Wire Shielded, 18 Gallon Cable

Intrinsically safe when used with an approved I.S. barrier

Typical Signal Output: GP: 4-20 mA, 12-36 VDC / IS: 4-20 mA, 12-32 VDC


Mounting Threads: 2" NPT (2" G)

Conduit Connection: 1/2" NPT (1/2" BSP)

CE Compliance: EN 50082-2 immunity

EN 55011 emission

CSA Certificate: LR79326-10

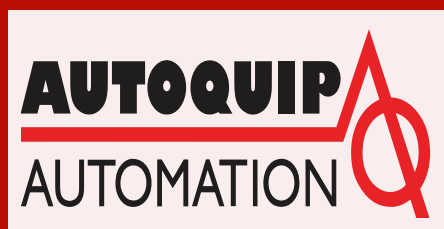

www.aqautomation.com

N57W13430 Reichert Avenue
Menomonee Falls, WI 53051
Tel. 262-781-6133 Fax 262-781-6188
sales@aqautomation.com