

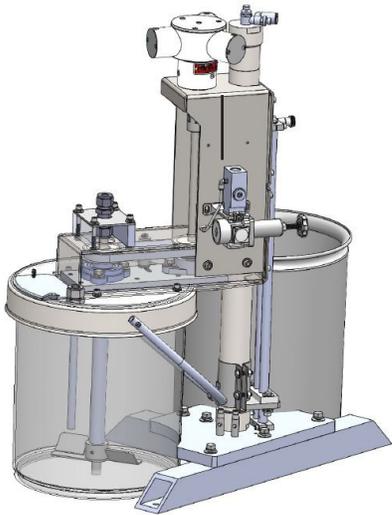


Ordering Info

3099-5GPL-XXX

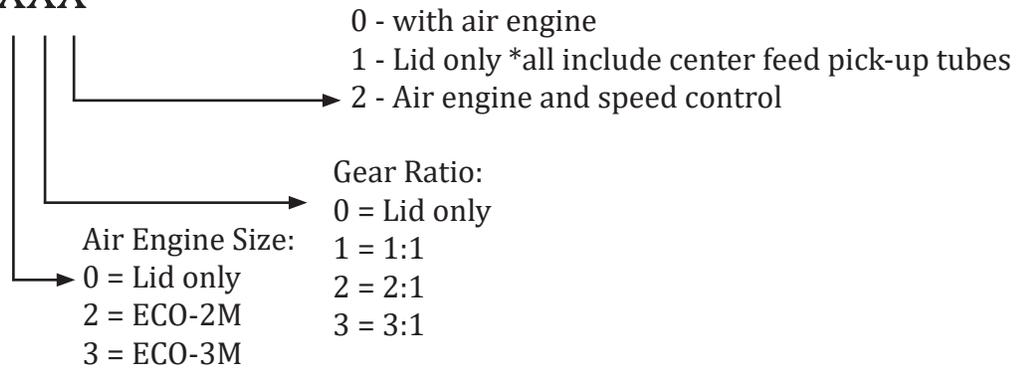

5 GALLON PAIL LIFT W/AIR ENGINE
AND RPM CONTROL 1:1

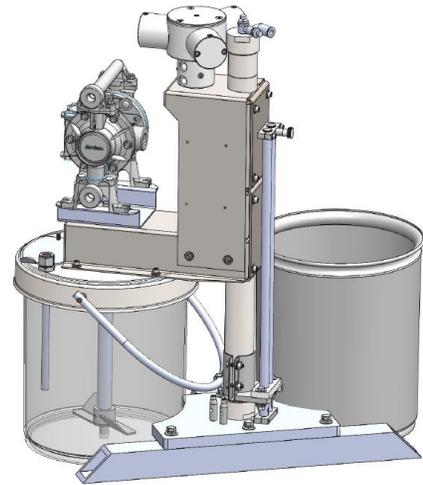

5 GALLON PAIL LIFT W/ AIR ENGINE
AND OPTIONAL PUMP MOUNT

Simple and Flexible 5 Gallon Pail Lift System

- Free standing base for portable use
- Full pail width center feed 6 inch mixing blade
- Center feed fluid suction tube
- Dual pail positive lock system
- Mounting provided for Piston Air Engine and Closed Loop RPM Control
- Easy access for agitator and lifting speed control

AUTOQUIP 3099-5GPL-XXX

Ergonomic 5 Gallon Pail Lift System

Standard Features

- Simple clean mechanical design
- Closed Loop RPM Control for agitator speed
- Ultra-low air consumption
- Elevator lift reduces ergonomic issues
- Heavy duty base allows centering of two pails
- Versatile pump mounting system adapts to diaphragm or piston pumps
- Large center feed blending blade and slow speed reduces process issues

Technical Specifications

Maximum Air Inlet Pressure: 90 psi

Air Inlet Connection: 3/8" NPT (f)

Maximum Weight Capacity: 160 lbs. @60 psi, 215 lbs. @90 psi

Designed for use with customer supplied air quick disconnect so the unit cannot be raised unless the rotation has been deactivated.

Optional Pump Mounting Brackets

3099-0520-013	Graco adapter, on lift
3099-0520-020	Nordson adapter, on lift
3099-0520-023	Binks Gemini adapter, on lift
3099-0520-079	3D150 Endura Flo, Base mounted
3099-0520-022	Iwata pump adapter, on lift

Please contact Autoquip to verify your pump model works with the offered brackets.

Custom brackets available, please submit your request with pump make and model for fit verification.

www.aqautomation.com

N57W13430 Reichert Avenue
Menomonee Falls, WI 53051
Ph: 262-781-6133 • Fx 262-781-6188
sales@aqautomation.com

AUTOQUIP
AUTOMATION

