

## AQ Piggable Color Valve Price Analysis

CV 3096 -

A	B	C	D	E	F	G	H
2	4	2	1	15	2	1	2

### Color Valve

#### Color Valve Block Type "A"

- 1 = Single Piggable (Single Path)
- 2 = Double Piggable (Dual Path)

#### Inlet Size "B"

- 1 = 1/2"
- 2 = 5/8"
- 3 = 3/4"
- 4 = 1"

#### Wall Thickness "C"

- 1 = 0.049"
- 2 = 0.065"

#### Connection Type "D"

- 1 = Sanitary
- 2 = Tube Stub

#### Number of Colors "E"

XX = Enter Number of Colors

#### Flush Blocks "F"

- 0 = No
- 1 = Solvent Only
- 2 = Air Only
- 3 = Solvent and air

#### Outlet Size "G"

- 1 = 1/4" NPT (f)
- 2 = 3/8" NPT (f)

#### Mounting Bracket(s) "H"

- 1 = None

### Description Example:

**CV 3096-2421-15-212**

Color Valve Block Type: Double Piggable

Inlet Size: 1"

Wall Thickness: 0.065"

Connection Type: Sanitary

Number of Color Valves: 15

Flush Blocks: Air Only

Outlet Size: 1/4" NPT


Mounting Bracket: 2

### Standard Features

- Greatly reduces flushing waste
- Cut color change time
- Wide variety of sizes available
- Air tight, efficient system
- Quick disconnect settings
- Work with existing non-piggable color change systems
- Stainless steel wetted components

### Options

- Multiple port sizes available for varying length circulation systems  
1/2", 5/8", 3/4" and 1" typical
- Available in sanitary or compression fittings

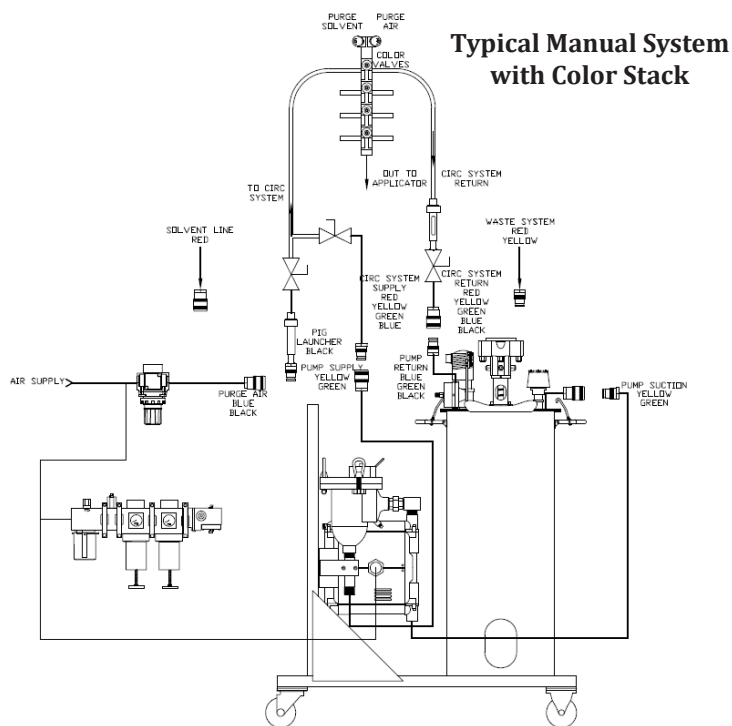

[www.aqautomation.com](http://www.aqautomation.com)

N57W13430 Reichert Avenue  
Menomonee Falls, WI 53051  
Ph: 262-781-6133 • Fx 262-781-6188  
sales@aqautomation.com

# AUTOQUIP AUTOMATION

